



## Astles Draw-Up Tube

The Astles draw-up tube has been designed to fit on the suction side of chemical delivery hose to give a filtered non-return supply of chemical. It is available in standard lengths of 1.85m, 1.25m, 0.95m and 0.75m— suitable for 1000L tote tanks, 205L and 25L drums, respectively. Also available to fit 1800L day tanks and 200L Astles day tank systems.

These are fitted as standard with 90° connectors, but straight connections can be fitted if requested. Custom lengths are available on request. The draw-up tube is manufactured from PVC for high chemical resistance and can be supplied with fittings for hoses of size 4/6, 5/10, 6/9, 6/12, 9/12, 10/15 (ID/OD in mm) & 6/12 barbed for Double wall chemical hose. Maximum flow rate is 120l/h.



### Dimensions

Union Nut	38mm
Outlet Joint	38mm
Tube	21.3mm*
Guide	27mm
Filter	27mm

### Specifications

Code	Length	Diameter	Threaded Collar
500/4511-[X]	0.75m	½"	No
500/4513-[X]	0.95m	½"	No
500/4515-[X]	1.25m	½"	No
500/4578-[X]	1.85m	½"	Yes
500/4575-[X]	0.75m	½"	Yes

Replace [X] with the hose fitting: 4/6, 5/10, 6/9, 9/12, 10/15 or 6/12 Double-wall

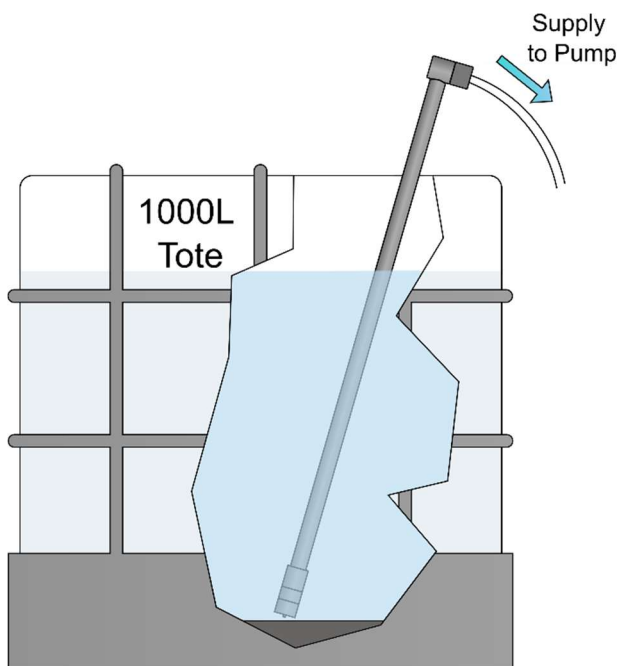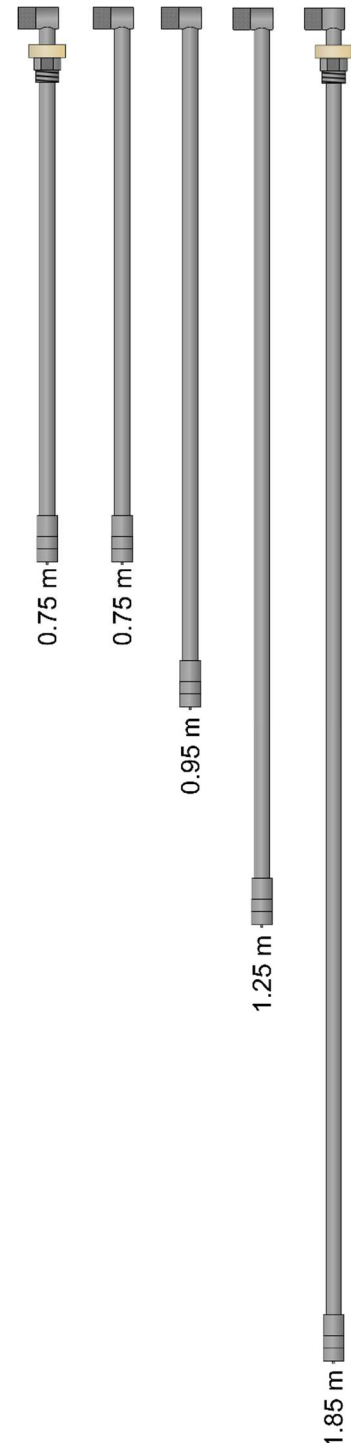

Astles Draw-Up Tube

